

# Font Guide

---

---

## Contents

### Copyright and Trademarks

---

#### Chapter 1 Working with Fonts

---

Epson BarCode Fonts (Windows Only).....	4
System requirements.....	5
Installing Epson BarCode Fonts.....	5
Printing with Epson BarCode Fonts.....	6
Epson BarCode Fonts specifications.....	8
Available fonts.....	18
PCL mode.....	18
ESC/P 2 and FX modes.....	20
I239X mode.....	21
PS 3 mode.....	21
Printing font samples.....	22
Adding more fonts.....	23
Selecting fonts.....	23

#### Chapter 2 Symbol Sets

---

Introduction to symbol sets.....	24
In the PCL5 mode.....	24
In the ESC/P 2 or FX Modes.....	27
International character sets.....	29
Characters available with the ESC (^ command).....	30
In the I239X Emulation Mode.....	30

### Index

---

---

## Copyright and Trademarks

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, mechanical, photocopying, recording, or otherwise, without the prior written permission of Seiko Epson Corporation. No patent liability is assumed with respect to the use of the information contained herein. Neither is any liability assumed for damages resulting from the use of the information contained herein.

Neither Seiko Epson Corporation nor its affiliates shall be liable to the purchaser of this product or third parties for damages, losses, costs, or expenses incurred by purchaser or third parties as a result of: accident, misuse, or abuse of this product or unauthorized modifications, repairs, or alterations to this product, or (excluding the U.S.) failure to strictly comply with Seiko Epson Corporation's operating and maintenance instructions.

Seiko Epson Corporation and its affiliates shall not be liable against any damages or problems arising from the use of any options or any consumable products other than those designated as Original Epson Products or Epson Approved Products by Seiko Epson Corporation.

EPSON, EPSON EXCEED YOUR VISION, EXCEED YOUR VISION, EPSON ESC Page, EPSON ESC/P and their logos are registered trademarks and Epson ESC/P2 are trademark of Seiko Epson Corporation.

IBM and PS/2 are registered trademarks of International Business Machines Corporation.

Microsoft® and Windows® are registered trademarks of Microsoft Corporation.

Albertus, Arial, Coronet and Times New Roman are trademarks of The Monotype Corporation registered in the U.S. Patent and Trademark Office and may be registered in certain jurisdictions.

ITC Avant Garde, ITC Bookman, ITC Symbol, ITC Zapf-Chancery, and ITC ZapfDingbats are trademarks of International Typeface Corporation registered in the U.S. Patent and Trademark Office and may be registered in certain other jurisdictions.

Clarendon and New Century Schoolbook are trademarks of Linotype GmbH registered in the U.S. Patent and Trademark Office and may be registered in certain other jurisdictions.

Helvetica, Palatino, Times and Univers are trademarks of Linotype Corp. registered in the U.S. Patent and Trademark Office and may be registered in certain other jurisdictions in the name of Linotype Corp. or its licensee Linotype GmbH.

Antique Olive is a registered trademark of M. Olive.

Marigold is a trademark of AlphaOmega Typography.

HP and PCL are registered trademarks of the Hewlett-Packard Company.

*General Notice: Other product names used herein are for identification purposes only and may be trademarks of their respective owners. Epson disclaims any and all rights in those marks.*

© 2017 Seiko Epson Corporation.

## Chapter 1

### Working with Fonts

#### Epson BarCode Fonts (Windows Only)

Epson BarCode Fonts let you easily create and print many types of bar codes.

Normally, bar code creation is a laborious process requiring you to specify various command codes, such as Start bar, Stop bar and OCR-B, in addition to the bar code characters themselves. However, Epson BarCode Fonts are designed to add such codes automatically, allowing you to easily print bar codes that conform to a variety of bar code standards.

Epson BarCode Fonts support the following types of bar codes.

Bar code Standard	Epson BarCode	OCR-B	Check Digit	Comments
EAN	EPSON EAN-8	Yes	Yes	Creates EAN (abbreviated version) bar codes.
	EPSON EAN-13	Yes	Yes	Creates EAN (standard version) bar codes.
UPC-A	EPSON UPC-A	Yes	Yes	Creates UPC-A bar codes.
UPC-E	EPSON UPC-E	Yes	Yes	Creates UPC-E bar codes.
Code39	EPSON Code39	No	No	Printing of OCR-B and check digits can be specified with the font name.
	EPSON Code39 CD	No	Yes	
	EPSON Code39 CD Num	Yes	Yes	
	EPSON Code39 Num	Yes	No	
Code128	EPSON Code128	No	Yes	Creates Code128 bar codes.
Interleaved 2 of 5 (ITF)	EPSON ITF	No	No	Printing of OCR-B and check digits can be specified with the font name.
	EPSON ITF CD	No	Yes	
	EPSON ITF CD Num	Yes	Yes	
	EPSON ITF Num	Yes	No	

Bar code Standard	Epson BarCode	OCR-B	Check Digit	Comments
Codabar	EPSON Codabar	No	No	Printing of OCR-B and check digits can be specified with the font name.
	EPSON Codabar CD	No	Yes	
	EPSON Codabar CD Num	Yes	Yes	
	EPSON Codabar Num	Yes	No	
GS1-128(EAN128)	EPSON EAN128	Yes	Yes	Creates GS1-128(EAN128) barcodes.

## System requirements

To use Epson BarCode Fonts, your computer system should meet the following requirements:

Computer:	IBM PC series or IBM compatible with an Pentium/Celeron or higher CPU
Operating system*:	Same as the Microsoft Windows operating system specified for the printer's operating environment
Hard disk:	15 to 30 KB free space, depending on the font.

\* Epson BarCode Fonts can only be used with Epson ESC/Page printer drivers.

## Installing Epson BarCode Fonts

Follow the steps below to install Epson BarCode Fonts from the Software Disc that came with your product.

### Note:

- If your computer does not have a disc drive, download the Epson BarCode Fonts from the Epson website, and then install it.

<http://www.epson.eu/support/> (Europe)

<http://support.epson.net/> (outside Europe)

- Note that you have to install the Epson ESC/Page printer driver first, if you have not installed it.

1. Make sure that the printer is off and that Windows is running on your computer.
2. Insert your printer's Software Disc in the disc drive.

**Note:**


If the Epson Installation Program screen appears, click **Cancel**.

3. If your disc drive is D:, double-click **setup.exe** in the **D:\Apps\BarcodeFont\Win32\** for 32-bit Windows OS or **D:\Apps\BarcodeFont\Win64\** for 64-bit Windows OS.
4. Follow the on-screen instructions.


## Printing with Epson BarCode Fonts

Follow the steps below to create and print bar codes using Epson BarCode Fonts. The application featured in these instructions is Microsoft WordPad in Windows 8. The actual procedure may differ slightly when printing from other applications.

1. Open a document in your application and enter the characters you want to convert into a bar code.

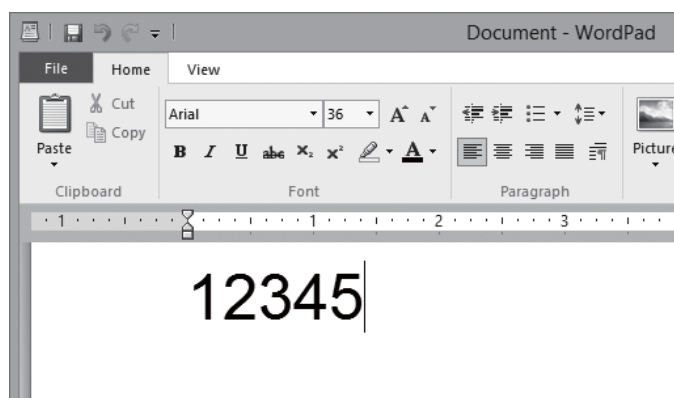


2. Select the characters, then select the Epson BarCode font you want to use, and the font size.

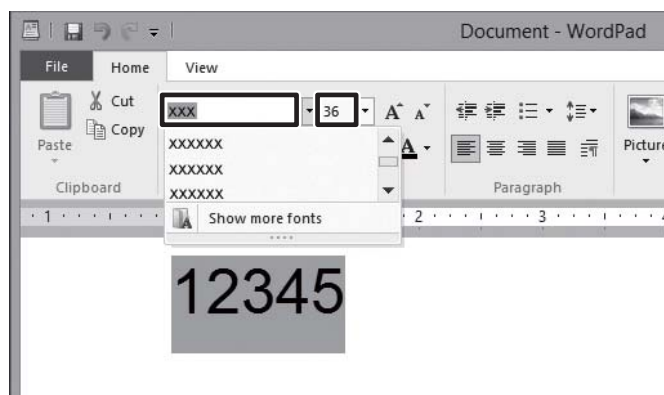

**Note:**

You cannot use font sizes larger than 96 points when printing bar codes.

- The characters you selected appear as bar code characters similar to those shown below.

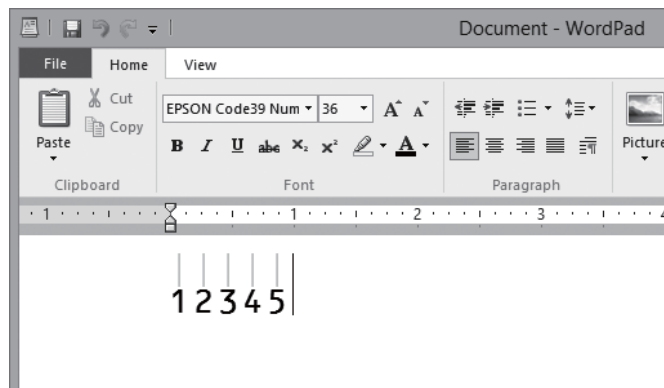

- Select **Print** from the File menu, select your Epson printer, then click **Preferences**. Make the following printer driver settings. In the table below, see the column that is appropriate for your printer.

	<b>Black-and-white Printer Driver</b>	<b>Color Printer Driver</b>	<b>Host Based Black-and-white Printer Driver</b>	<b>Host Based Color Printer Driver</b>
Color	(not available)	Grayscale	(not available)	Grayscale
Quality	High*	High*	High*	High*
Toner Save	Not selected	Not selected	Not selected	Not selected
Zoom Options	Not selected	Not selected	Not selected	Not selected

\* This setting can be changed by selecting More Settings and then setting the slide bar to **Fine** or **Maximum** in the Quality Settings window.

- Click **Print** to print the bar code.

**Note:**

If there is an error in the bar code character string, such as inappropriate data, the bar code will be printed as it appears on the screen, but it cannot be read by a bar code reader.

**Notes on inputting and formatting bar codes**

Please note the following when inputting and formatting bar code characters:

- ❑ Do not apply shading or special character formatting, such as bold, italic, or underline.
- ❑ Print bar codes in black and white only.
- ❑ When rotating characters, only specify rotation angles of 90°, 180°, and 270°.
- ❑ Turn off all automatic character and word spacing settings in your application.
- ❑ Do not use features in your application that enlarge or reduce the size of characters in only the vertical or horizontal direction.
- ❑ Turn off your application's auto-correct features for spelling, grammar, spacing, etc.
- ❑ To more easily distinguish bar codes from other text in your document, set your application to show text symbols, such as paragraph marks, tabs, etc.
- ❑ Because special characters such as Start bar and Stop bar are added when an Epson BarCode Font is selected, the resulting bar code may have more characters than were originally input.
- ❑ For best results, use only the font sizes recommended in "Epson BarCode Fonts specifications" on page 8 for the Epson BarCode Font you are using. Bar codes in other sizes may not be readable with all bar code readers.

**Note:**

*Depending on the print density, or on the quality or color of the paper, bar codes may not be readable with all bar code readers. Print a sample and make sure the bar code can be read before printing large quantities.*

## **Epson BarCode Fonts specifications**

This section contains details on the character input specifications for each Epson BarCode Font.

### **EPSON EAN-8**

- ❑ EAN-8 is an eight-digit abbreviated version of the EAN bar code standard.
- ❑ Because the check digit is added automatically, only 7 characters can be input.

Character type	Numbers (0 to 9)
Number of characters	7 characters
Font size	52 pt to 96 pt. Recommended sizes are 52 pt and 65 pt (standard).

The following codes are inserted automatically and need not be input by hand:



- Left/Right margin
- Left/Right guard bar
- Center bar
- Check digit
- OCR-B

**Print sample**



**EPSON EAN-13**


- EAN-13 is the standard 13-digit EAN bar code.
- Because the check digit is added automatically, only 12 characters can be input.

Character type	Numbers (0 to 9)
Number of characters	12 characters
Font size	60 pt to 96 pt. Recommended sizes are 60 pt and 75 pt (standard).

The following codes are inserted automatically and need not be input by hand:

- Left/Right margin
- Left/Right guard bar
- Center bar
- Check digit
- OCR-B

**Print sample**



### EPSON UPC-A


- UPC-A is the standard bar code specified by the American Universal Product Code (UPC Symbol Specification Manual).
- Only regular UPC codes are supported. Supplementary codes are not supported.

Character type	Numbers (0 to 9)
Number of characters	11 characters
Font size	60 pt to 96 pt. Recommended sizes are 60 pt and 75 pt (standard).

The following codes are inserted automatically and need not be input by hand:

- Left/Right margin
- Left/Right guard bar
- Center bar
- Check digit
- OCR-B

### Print sample

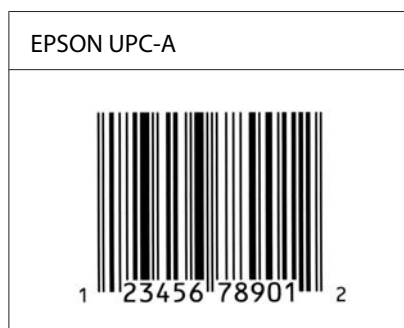


**EPSON UPC-E**

- UPC-E is the UPC-A zero-suppression (deletes extra zeros) bar code specified by the American Universal Product Code (UPC Symbol Specification Manual).

Character type	Numbers (0 to 9)
Number of characters	6 characters
Font size	60 pt to 96 pt. Recommended sizes are 60 pt and 75 pt (standard).

The following codes are inserted automatically and need not be input by hand:

- Left/Right margin
- Left/Right guard bar
- Check digit
- OCR-B
- The numeral “0”

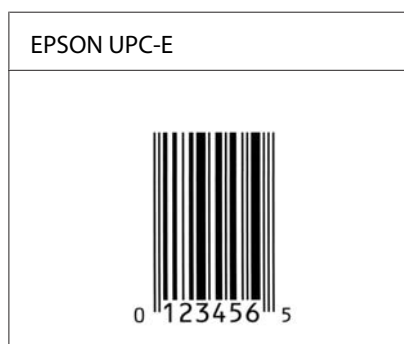**Print sample****EPSON Code39**

- Four Code39 fonts are available, allowing you to enable and disable the automatic insertion of check digits and OCR-B.
- The height of the bar code is automatically adjusted to 15% or more of its total length, in conformance to the Code39 standard. For this reason, it is important to keep at least one space between the bar code and the surrounding text to prevent overlapping.
- Spaces in Code39 bar codes should be input as “\_” underbars.

- ❑ When printing two or more bar codes on one line, separate the bar codes with a tab, or select a font other than a BarCode Font and input the space. If a space is input while a Code39 font is selected, the bar code will not be correct.

Character type	Alphanumeric characters (A to Z, 0 to 9) Symbols (- . space \$ / + %)
Number of characters	No limit
Font size	When OCR-B is not used: 26 pt to 96 pt. Recommended sizes are 26 pt, 52 pt and 78 pt. When OCR-B is used: 36 pt to 96 pt. Recommended sizes are 36 pt and 72 pt.

The following codes are inserted automatically and need not be input by hand:

- ❑ Left/Right quiet zone
- ❑ Check digit
- ❑ Start/Stop character

### Print sample

EPSON Code39	EPSON Code39 CD
	
EPSON Code39 Num	EPSON Code39 CD Num
 1 2 3 4 5 6 7	 1 2 3 4 5 6 7 S

### EPSON Code128

- ❑ Code128 fonts support code sets A, B, and C. When the code set of a line of characters is changed in the middle of the line, a conversion code is automatically inserted.
- ❑ The height of the bar code is automatically adjusted to 15% or more of its total length, in conformance to the Code128 standard. For this reason, it is important to keep at least one space between the bar code and the surrounding text to prevent overlapping.


- Some applications automatically delete the spaces at the end of lines or change multiple spaces into tabs. Bar codes containing spaces may not be correctly printed from applications that automatically delete spaces from the ends of lines or change multiple spaces into tabs.
- When printing two or more bar codes on one line, separate the bar codes with a tab, or select a font other than a BarCode Font and input the space. If a space is input while Code128 is selected, the bar code will not be correct.

Character type	All ASCII characters (95 in total)
Number of characters	No limit
Font size	26 pt to 96 pt. Recommended sizes are 26 pt, 52 pt and 78 pt.

The following codes are inserted automatically and need not be input by hand:

- Left/Right quiet zone
- Start/Stop character
- Check digit
- Change code set character

### Print sample

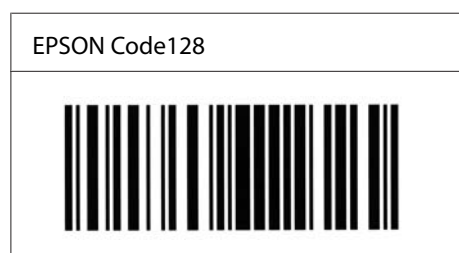

### **EPSON ITF**

- The EPSON ITF fonts conform to the USS Interleaved 2-of-5 standard (American).
- Four EPSON ITF fonts are available, allowing you to enable and disable the automatic insertion of check digits and OCR-B.
- The height of the bar code is automatically adjusted to 15% or more of its total length, in conformance to the Interleaved 2-of-5 standard. For this reason, it is important to keep at least one space between the bar code and the surrounding text to prevent overlapping.

- Interleaved 2 of 5 treats every two characters as one set. When there are an odd number of characters, EPSON ITF fonts automatically add a zero to the beginning of the character string.

Character type	Numbers (0 to 9)
Number of characters	No limit
Font size	When OCR-B is not used: 26 pt to 96 pt. Recommended sizes are 26 pt, 52 pt and 78 pt. When OCR-B is used: 36 pt to 96 pt. Recommended sizes are 36 pt and 72 pt.

The following codes are inserted automatically and need not be input by hand:

- Left/Right quiet zone
- Start/Stop character
- Check digit
- The numeral “0” (added to the beginning of character strings as needed)

### Print sample

EPSON ITF	EPSON ITF CD
	

EPSON ITF Num	EPSON ITF CD Num
 0 1 2 3 4 5 6 7	 1 2 3 4 5 6 7 0

### EPSON Codabar

- Four Codabar fonts are available, allowing you to enable and disable the automatic insertion of check digits and OCR-B.





- The height of the bar code is automatically adjusted to 15% or more of its total length, in conformance to the Codabar standard. For this reason, it is important to keep at least one space between the bar code and the surrounding text to prevent overlapping.
- When either a Start or a Stop character is input, Codabar fonts automatically insert the complementary character.
- If neither a Start nor a Stop character is input, these characters are automatically input as the letter “A”.

Character type	Numbers (0 to 9) Symbols (- \$ : / . +)
Number of characters	No limit
Font size	When OCR-B is not used: 26 pt to 96 pt. Recommended sizes are 26 pt, 52 pt and 78 pt. When OCR-B is used: 36 pt to 96 pt. Recommended sizes are 36 pt and 72 pt.

The following codes are inserted automatically and need not be input by hand:

- Left/Right quiet zone
- Start/Stop character (when not input)
- Check digit

### Print sample

EPSON Codabar	EPSON Codabar CD
	
EPSON Codabar Num	EPSON Codabar CD Num
 A 1 2 3 4 5 6 7 A	 A 1 2 3 4 5 6 7 4 A

**EPSON EAN128**

- GS1-128(EAN128) fonts support code sets A, B, and C. When the code set of a line of characters is changed in the middle of the line, a conversion code is automatically inserted.
- The following 4 kinds of the properties are supported as the Application Identifier (AI).
  - 01: Global traded item number
  - 10: Batch / Lot number
  - 17: Expiry date
  - 30: Quantity
- The height of the bar code is automatically adjusted to 15% or more of its total length, in conformance to the Code128 standard. For this reason, it is important to keep at least one space between the bar code and the surrounding text to prevent overlapping.
- Some applications automatically delete the spaces at the end of lines or change multiple spaces into tabs. Bar codes containing spaces may not be correctly printed from applications that automatically delete spaces from the ends of lines or change multiple spaces into tabs.
- When printing two or more bar codes on one line, separate the bar codes with a tab, or select a font other than a BarCode Font and input the space. If a space is input while GS1-128(EAN128) is selected, the bar code will not be correct.

Character type	Alphanumeric characters (A to Z, 0 to 9) Parenthesis are only for identification of the Application Identifier (AI) Only the capital letters are supported by the small letter key input.
Number of characters	It changes with the Application Identifier (AI). 01: 4 characters "(01)" and 13 numbers 17: 4 characters "(17)" and 6 numbers 10: 4 characters "(10)" and maximum of 20 alphanumeric characters 30: 4 characters "(30)" and maximum of 8 numbers
Font size	36 pt or more Recommended sizes are 36 pt, 72 pt

The following codes are inserted automatically and need not be input by hand:

- Left/Right quiet zone
- Start/Stop character
- FNC1 character



It inserts for discernment from Code128 and for a pause of the variable length application identifier.

- Check digit
- Change code set character

### Print sample



## Available fonts

The fonts provided with the printer are shown below, according to the emulation mode.

### PCL mode

For symbol set for PCL5, see “In the PCL5 mode” on page 24.

### Scalable Font

Font Name	Family	HP Equivalent	Symbol Set for PCL5
Nimbus Mono	Medium, Bold, Italic, Bold Italic	Courier	*1
Letter Gothic	Medium, Bold, Italic	Letter Gothic	*1
Nimbus Mono PS	Regular, Bold, Oblique, Bold Oblique	CourierPS	*3
Nimbus Roman No4	Medium, Bold, Italic, Bold Italic	CG Times	*2
URW Classico	Medium, Bold, Italic, Bold Italic	CG Omega	*3
URW Coronet	-	Coronet	*3
URW Clarendon Condensed	-	Clarendon Condensed	*3
URW Classic Sans	Medium, Bold, Italic, Bold Italic	Univers	*2
URW Classic Sans Condensed	Medium, Bold, Italic, Bold Italic	Univers Condensed	*3
Antique Olive	Medium, Bold, Italic	Antique Olive	*3
Garamond	Antiqua, Halbfett, Kursiv, Kursiv Halbfett	Garamond	*3
Mauritius	-	Marigold	*3
Algiers	Medium, Extra Bold	Albertus	*3
NimbusSansNo2	Medium, Bold, Italic, Bold Italic	Arial	*3
Nimbus Roman No9	Medium, Bold, Italic, Bold Italic	Times New	*3
Nimbus Sans	Medium, Bold, Oblique, Bold Oblique	Helvetica	*3
Nimbus Sans Narrow	Medium, Bold, Oblique, Bold Oblique	Helvetica Narrow	*3

Font Name	Family	HP Equivalent	Symbol Set for PCL5
Palladio	Roman, Bold, Italic, Bold Italic	Palatino	*3
URW Gothic	Book Demi, Book Oblique, Demi Oblique	ITC Avant Garde Gothic	*3
URW Bookman	Light, Demi, Light Italic, Demi Italic	ITC Bookman	*3
URW Century Schoolbook	Roman, Bold, Italic, Bold Italic	New Century Schoolbook	*3
Nimbus Roman	Medium, Bold, Italic, Bold Italic	Times	*3
URW Chancery Medium Italic	-	ITC Zapf Chancery Medium Italic	*3
Symbol	-	Symbol	*4
URW Dingbats	-	Wingdings	*5
Dingbats	-	ITC Zapf Dingbats	*6
Standard Symbol	-	SymbolPS	*4
URW David	Medium, Bold	HP David	*7
URW Narkis	Medium, Bold	HP Narkis	*7
URW Miryam	Medium, Bold, Italic	HP Miryam	*7
URW Koufi	Medium, Bold	Koufi	*8
URW Naskh	Medium, Bold	Naskh	*8
URW Ryadh	Medium, Bold	Ryadh	*8

### **Bitmap Font (for PCL5/PCL6)**

Font Name	Symbol Set
Line Printer	*9

### **OCR/BarCode Bitmap Font (for PCL5 only)**

Font Name	Family	Symbol Set
OCR A	-	*10
OCR B	-	*11

Font Name	Family	Symbol Set
Code39	9.37cpi, 4.68cpi	*12
EAN/UPC	Medium, Bold	*13

**Note:**

*Depending on the print density, or on the quality or color of the paper, OCR A, OCR B, Code39, and EAN/UPC fonts may not be readable. Print a sample and make sure the fonts can be read before printing large quantities.*

**ESC/P 2 and FX modes**

Font Name	Family	Epson equivalent*2
Nimbus Mono	Medium, Bold	Courier
EPSON Prestige	-	Prestige
EPSON Roman	-	Roman
EPSON Sans serif	-	Sans serif
NimbusSansNo2*1	Medium, Bold	Sans H
Letter Gothic	Regular, Bold	Orator S
Nimbus Roman No4	Medium, Bold	Roman T
EPSON Script	-	Script
OCR A	-	OCR A
OCR B	-	OCR B

\*1 Available only in ESC/P2 mode.

\*2 Select this name through the printer's control panel or EpsonNet Config with Web Browser.

**Note:**

*Depending on the print density, or on the quality or color of the paper, OCR A and OCR B fonts may not be readable. Print a sample and make sure the fonts can be read before printing large quantities.*

## I239X mode

Font Name	Family	IBM equivalent*
Nimbus Mono	Medium, Bold	Courier
EPSON Prestige	-	Prestige
EPSON Gothic	-	Gothic
EPSON Orator	-	Orator
EPSON Script	-	Script
EPSON Presentor	-	Presentor
EPSON Sans serif	-	Sans serif
OCR B	-	OCR B

\* Select this name through the printer's control panel or EpsonNet Config with Web Browser.

### Note:

*Depending on the print density, or on the quality or color of the paper, the OCR B font may not be readable. Print a sample and make sure the font can be read before printing large quantities.*

## PS 3 mode

### 80 scalable fonts

Font Name	Family	HP Equivalent
Nimbus Mono	Medium, Bold, Italic, Bold Italic	Courier
Letter Gothic	Medium, Bold, Italic	Letter Gothic
Nimbus Mono PS	Regular, Bold, Oblique, Bold Oblique	CourierPS
Nimbus Roman No4	Medium, Bold, Italic, Bold Italic	CG Times
URW Classico	Medium, Bold, Italic, Bold Italic	CG Omega
URW Coronet	-	Coronet
URW Clarendon Condensed	-	Clarendon Condensed
URW Classic Sans	Medium, Bold, Italic, Bold Italic	Univers
URW Classic Sans Condensed	Medium, Bold, Italic, Bold Italic	Univers Condensed

Font Name	Family	HP Equivalent
Antique Olive	Medium, Bold, Italic	Antique Olive
Garamond	Antiqua, Halbfett, Kursiv, Kursiv Halbfett	Garamond
Mauritius	-	Marigold
Algiers	Medium, Extra Bold	Albertus
NimbusSansNo2	Medium, Bold, Italic, Bold Italic	Arial
Nimbus Roman No9	Medium, Bold, Italic, Bold Italic	Times New Roman
Nimbus Sans	Medium, Bold, Oblique, Bold Oblique	Helvetica
Nimbus Sans Narrow	Medium, Bold, Oblique, Bold Oblique	Helvetica Narrow
Palladio	Roman, Bold, Italic, Bold Italic	Palatino
URW Gothic	Book, Demi, Book Oblique, Demi Oblique	ITC Avant Garde
URW Bookman	Light, Demi, Light Italic, Demi Italic	ITC Bookman
URW Century Schoolbook	Roman, Bold, Italic, Bold Italic	New Century Schoolbook
Nimbus Roman	Medium, Bold, Italic, Bold Italic	Times
URW Chancery Medium Italic	-	ITC Zapf Chancery Italic
Symbol	-	Symbol
URW Dingbats	-	Wingdings
Dingbats	-	ITC Zapf Dingbats
Standard Symbol	-	SymbolPS

## Printing font samples

If your printer has a control panel, you can print samples of the fonts available in each mode by using the control panel's Information Menu. Follow these steps to print font samples.

1. Make sure that paper is loaded.
2. Make sure the LCD panel displays *Ready* or *Standby*, then press the ► **Right** button.

3. Select **System Information > System Report** using the **▼ Down** and **► Right** buttons.
4. Select the font sample for the appropriate mode in **System Report**, and then press the **► Right** button to print the selected font sample sheet.

**Note:**

*You can print a font sample sheet from a Web browser if your printer supports EpsonNet Config with Web Browser.*

### **Using EpsonNet Config with Web Browser**

1. Make sure that paper is loaded.
2. Run EpsonNet Config with a web browser.

See the Network Guide for the procedure to access EpsonNet Config with a web browser.

3. Access **Information > System > Confirmation > System Report Printing**.
4. Select the font sample from System Report and click **Print**.

---

## **Adding more fonts**

You can add a wide variety of fonts to your computer. Most font packages include an installer for this purpose.

See your computer documentation for instructions on installing fonts.

---

## **Selecting fonts**

Whenever possible select fonts in your application. See your software documentation for instructions.

If you are sending unformatted text to the printer directly from DOS or if you are using a simple software package that does not include font selection, you can select fonts using the printer's control panel menus or by using EpsonNet Config with Web Browser when in the PCL, ESC/P 2, FX, or I239X emulation mode.

## Chapter 2

# Symbol Sets

## Introduction to symbol sets

Your printer can access a variety of symbol sets. Many of these symbol sets differ only in the international characters specific to each language.

**Note:**

*Since most software handles fonts and symbols automatically, you will probably never need to adjust the printer's settings. However, if you are writing your own printer control programs, or if you are using older software that cannot control fonts, refer to the following sections for symbol set details.*

When you are considering which font to use, you should also consider which symbol set to combine with the font. Available symbol sets vary depending on which emulation mode you use and which font you choose.

## In the PCL5 mode

Symbol sets that have no value in the attribute column are not supported.

Symbol Set Name	Attribute	Font Classification												
	PCL5	*1	*2	*3	*4	*5	*6	*7	*8	*9	*10	*11	*12	*13
Norweg1	0D	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Roman Extension	0E	-	-	-	-	-	-	-	-	✓	-	-	-	-
Italian	0I	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
ECM94-1	0N	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
Swedis2	0S	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
ANSI ASCII	0U	✓	✓	✓	-	-	-	✓	✓	-	-	-	-	-
UK	1E	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
French2	1F	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
German	1G	✓	✓	✓	-	-	-	-	-	-	-	-	-	-



Symbol Set Name	Attribute	Font Classification												
		PCL5	*1	*2	*3	*4	*5	*6	*7	*8	*9	*10	*11	*12
Legal	1U	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
8859-2 ISO	2N	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
Spanish	2S	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
ISO 8859/4 Latin 4	4N	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Roman-9	4U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PsMath	5M	✓	✓	✓	-	-	-	✓	✓	-	-	-	-	-
8859-9 ISO	5N	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
WiTurkish	5T	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
MsPublishin	6J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
VeMath	6M	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
8859-10ISO	6N	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
DeskTop	7J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Math-8	8M	✓	✓	✓	-	-	-	✓	✓	-	-	-	-	-
Roman-8	8U	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
WiE.Europe	9E	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Pc1004	9J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
8859-15ISO	9N	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
PcTk437	9T	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Windows	9U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PsText	10J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
IBM-US	10U	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
IBM-DN	11U	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-
McText	12J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PcMultiling	12U	✓	✓	✓	-	-	-	-	-	✓	-	-	-	-

Symbol Set Name	Attribute	Font Classification												
		PCL5	*1	*2	*3	*4	*5	*6	*7	*8	*9	*10	*11	*12
VeInternati	13J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PcEur858	13U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
VeUS	14J	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PiFont	15U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PcE.Europe	17U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Unicode 3.0	18N	✓	✓	✓	-	-	-	✓	✓	-	-	-	-	-
WiBALT	19L	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
WiAnsi	19U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
PcBlt775	26U	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Pc866Cyr	3R	✓	✓	-	-	-	-	-	-	-	-	-	-	-
Greek8	8G	✓	✓	-	-	-	-	-	-	-	-	-	-	-
WinGrk	9G	✓	✓	-	-	-	-	-	-	-	-	-	-	-
WinCyr	9R	✓	✓	-	-	-	-	-	-	-	-	-	-	-
Pc851Grk	10G	✓	✓	-	-	-	-	-	-	-	-	-	-	-
ISOCyr	10N	✓	✓	-	-	-	-	-	-	✓	-	-	-	-
Pc8Grk	12G	✓	✓	-	-	-	-	-	-	-	-	-	-	-
ISOGrk	12N	✓	✓	-	-	-	-	-	-	-	-	-	-	-
Pc866Ukr	14R	✓	✓	-	-	-	-	-	-	-	-	-	-	-
Hebrew7	0H	✓	-	-	-	-	-	✓	-	-	-	-	-	-
8859-8 ISO	7H	✓	-	-	-	-	-	✓	-	-	-	-	-	-
Hebrew8	8H	✓	-	-	-	-	-	✓	-	-	-	-	-	-
Pc862Heb	15H	✓	-	-	-	-	-	✓	-	-	-	-	-	-
PC-862, Hebrew	15Q	✓	-	-	-	-	-	✓	-	-	-	-	-	-
Arabic8	8V	-	-	-	-	-	-	-	✓	-	-	-	-	-
HPWARA	9V	-	-	-	-	-	-	-	✓	-	-	-	-	-

Symbol Set Name	Attribute	Font Classification												
		PCL5	*1	*2	*3	*4	*5	*6	*7	*8	*9	*10	*11	*12
Pc864Ara	10V	-	-	-	-	-	-	-	✓	-	-	-	-	-
Symbol	19M	-	-	-	✓	-	-	-	-	-	-	-	-	-
Wingdings	579L	-	-	-	-	✓	-	-	-	-	-	-	-	-
ZapfDingbats	14L	-	-	-	-	-	✓	-	-	-	-	-	-	-
OCR A	00	-	-	-	-	-	-	-	-	-	✓	-	-	-
OCR B	10	-	-	-	-	-	-	-	-	-	-	✓	-	-
OCR B Extension	3Q	-	-	-	-	-	-	-	-	-	-	✓	-	-
Code3-9	0Y	-	-	-	-	-	-	-	-	-	-	-	✓	-
EAN/UPC	8Y	-	-	-	-	-	-	-	-	-	-	-	-	✓

## In the ESC/P 2 or FX Modes

Character Table	Available typefaces			
	OCR B	FixedPitch 810*2	EPSON Roman EPSON Sans serif EPSON Prestige EPSON Script	Letter Gothic*3 NimbusSansNo2*4 Nimbus Roman No4*5
<b>PcUSA</b>	available	available	available	available
<b>PcMultilingual</b>	not available	available	available	available
<b>PcPortuguese</b>	not available	available	available	available
<b>PcCanFrench</b>	not available	available	available	available
<b>PcNordic</b>	not available	available	available	available
<b>PcE.Europe</b>	not available	available	not available	available
<b>PcTurk2</b>	not available	available	not available	available
<b>PcIcelandic</b>	not available	available	not available	available
<b>BpBRASCI</b>	not available	available	not available	available

Character Table	Available typefaces			
	OCR B	FixedPitch 810 <sup>*2</sup>	EPSON Roman EPSON Sans serif EPSON Prestige EPSON Script	Letter Gothic <sup>*3</sup> NimbusSansNo2 <sup>*4</sup> Nimbus Roman No4 <sup>*5</sup>
<b>BpAbicomp</b>	not available	available	not available	available
<b>Roman-8</b>	not available	available	available	available
<b>PcEur858</b>	available	available	available	available
<b>ISO Latin1</b>	not available	available	not available	available
<b>8859-15ISO</b>	not available	available	available	available
<b>PcSI437</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcTurk1</b> <sup>*1</sup>	not available	available	not available	not available
<b>8859-9 ISO</b> <sup>*1</sup>	not available	available	not available	not available
<b>Mazowia</b> <sup>*1</sup>	not available	available	not available	not available
<b>CodeMJK</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcGk437</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcGk851</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcGk869</b> <sup>*1</sup>	not available	available	not available	not available
<b>8859-7 ISO</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcCy855</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcCy866</b> <sup>*1</sup>	not available	available	not available	not available
<b>Bulgarian</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcUkr866</b> <sup>*1</sup>	not available	available	not available	not available
<b>Hebrew7</b> <sup>*1</sup>	not available	available	not available	not available
<b>Hebrew8</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcHe862</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcAr864</b> <sup>*1</sup>	not available	available	not available	not available

Character Table	Available typefaces			
	OCR B	FixedPitch 810 <sup>*2</sup>	EPSON Roman EPSON Sans serif EPSON Prestige EPSON Script	Letter Gothic <sup>*3</sup> NimbusSansNo2 <sup>*4</sup> Nimbus Roman No4 <sup>*5</sup>
<b>PcLit771</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcLit774</b> <sup>*1</sup>	not available	available	not available	not available
<b>Estonia</b> <sup>*1</sup>	not available	available	not available	not available
<b>ISO Latin 2</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcLat866</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcAr864Ara</b> <sup>*1</sup>	not available	available	not available	not available
<b>PcAr720</b> <sup>*1</sup>	not available	available	not available	not available

<sup>\*1</sup> Available only in ESC/P2 mode.

<sup>\*2</sup> Nimbus Mono is a type face compatible with Courier.

<sup>\*3</sup> Letter Gothic is a type face compatible with OratorS.

<sup>\*4</sup> NimbusSansNo2 is a type face compatible with SansH.

<sup>\*5</sup> Nimbus Roman No4 is a type face compatible with RomanT.

## ***International character sets***

You can select one of the following international character sets using the ESC R command:

Character sets: USA, France, Germany, UK, Japan, Denmark1, Denmark2, Sweden, Italy, Spain1, Spain2, Norway, Latin America, Korea<sup>\*</sup>, Legal<sup>\*</sup>

<sup>\*</sup> Available for ESC/P 2 emulation only

## Characters available with the ESC (^ command

To print the characters in the table below, use the ESC (^ command.

CODE	0	1	7
0			▶
1	☉		◀
2	⊗		↕
3	♥		!!
4	◆		¶
5	♣		
6	♠		—
7	•		⊕
8	■		↑
9	○		↓
A	⊙		→
B	♂		←
C	♀		↶
D	♪		↷
E	♫		▲
F	♩		▼ ◻

---

## In the I239X Emulation Mode

The available symbol sets in the I239X mode are PcUSA, PcMultilingual, PcEur858, PcPortuguese, PcCanFrench, PcNordic. See “In the ESC/P 2 or FX Modes” on page 27.

The available fonts are EPSON Sans Serif, FixedPitch 810 (compatible with Courier), EPSON Prestige, EPSON Gothic, EPSON Presentor, EPSON Orator, and EPSON Script.

## Index

<b>C</b>		<b>S</b>	
Characters available with the ESC (^ command.....	30	Symbol sets	
<b>E</b>		Characters available with the ESC (^ command.....	30
Epson BarCode Fonts		ESC/P 2 or FX modes.....	27
about.....	4	I239X emulation mode.....	30
how to install.....	5	International character sets.....	29
how to print.....	6	introduction.....	24
specifications.....	8		
system requirements.....	5		
ESC/P 2 and FX modes.....	20		
ESC/P 2 or FX modes.....	27		
<b>F</b>			
Fonts			
adding fonts.....	23		
available fonts.....	18		
Epson BarCode Fonts (about).....	4		
Epson BarCode Fonts (how to install).....	5		
Epson BarCode Fonts (how to print).....	6		
Epson BarCode Fonts (specifications).....	8		
Epson BarCode Fonts (system requirements).....	5		
ESC/P 2 and FX modes.....	20		
how to print samples.....	22		
I239X mode.....	21		
PCL mode.....	18		
PS 3 mode.....	21		
selecting fonts.....	23		
<b>I</b>			
I239X emulation mode.....	30		
I239X mode.....	21		
International character sets.....	29		
<b>P</b>			
PCL mode.....	18		
PS 3 mode.....	21		